



**Fast, Gentle, Clean
Nut Harvesting Systems**



30-36

**HIGH SPEED
ELEVATOR**

30-36

HIGH SPEED ELEVATOR



Real thinking, creative engineering, and craftsmanship produces the fastest speed you need for cleaner, more profitable delivery!




JackRabbit Woodchuck Desticker option

The Woodchuck Desticker removes more sticks for cleaner loads than any other type of desticking method. Trailers loaded with nuts and minimal sticks equals a more profitable load as it arrives to the huller or processor. Sticks are removed at the elevator not in the orchard to eliminate time and labor. The Woodchuck desticker is hydraulically actuated and can be raised with a push of a button for young orchards that typically don't have a stick problem. Desticker chain configurations are available for Almonds, Walnuts, and Pecans.



The **Woodchuck Desticker** stick belt removes the sticks away from the elevator and out of the orchard.

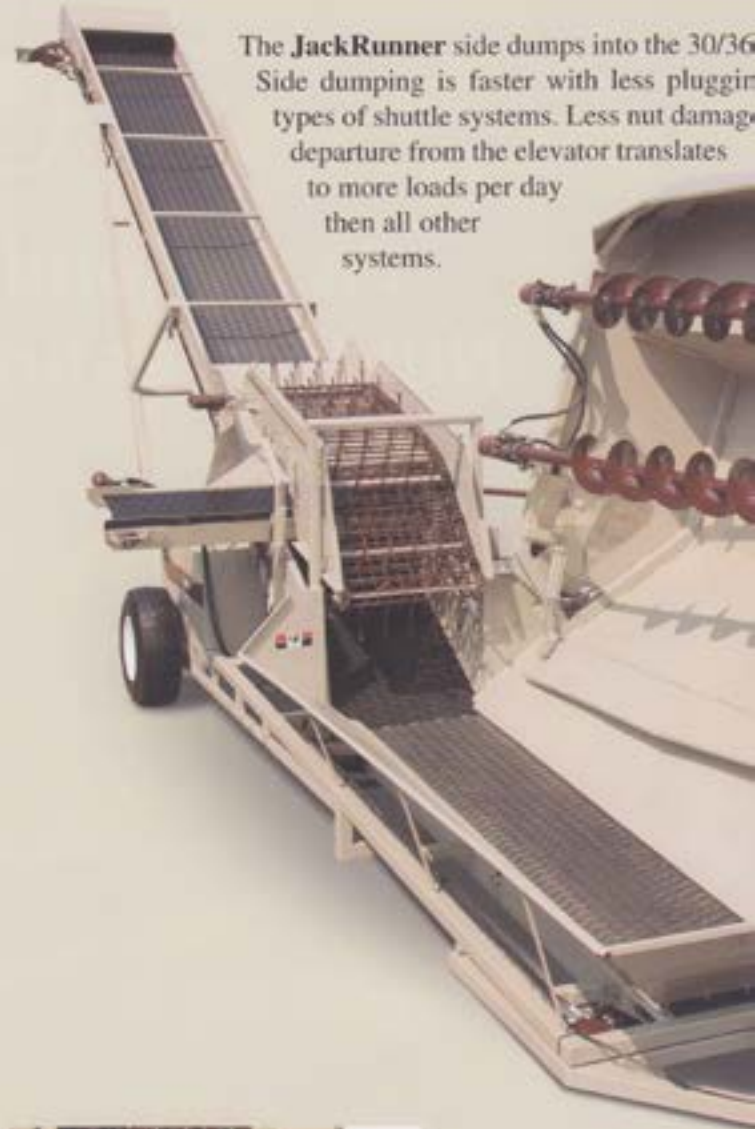

The **JackRunner** side dumps into the 30/36 elevator bin. Side dumping is faster with less plugging than other types of shuttle systems. Less nut damage, quicker departure from the elevator translates to more loads per day than all other systems.



Dual Belt System (30" Horizontal belt / 36" incline belt) allows the operator to control the belt speed for faster unloading, less plugging and minimal spilling.



Powerful Deutz air-cooled turbo diesel engine (69 HP)



Swing out pod with push button controls for operator convenience and simplicity (never have to leave your seat) (Remote control optional)



The **JackRunner** or Jack Cart pulls along side of the 30/36 elevator preparing to start the unloading process.

Hydraulic jack control located at the hitch for quick hook up for towing and relocating elevator.



The 36" wide incline belt moves product fast and gentle.



30-36

HIGH SPEED ELEVATOR

STANDARD FEATURES

Dual belt system

- 30° horizontal / 36° incline (30/36 elevator)
- 20° horizontal / 30° incline (20/30 elevator)
- 20° horizontal / 20° incline (20/20 elevator)

Deutz air cooled diesel engine

- 4 cylinder turbo, 69 H.P. (30/36 elevator)
- 3 cylinder, 46 H.P. (20/30 elevator)
- 3 cylinder, 46 H.P. (20/20 elevator)

Variable speed flow control (horizontal belt)

Dual drive horizontal belt motor

Large capacity hopper

Giant Z belt (horizontal and incline)

Hydraulic jack stand

Push button manual controls, swing out pod

Electric brakes (30/36 model)

OPTIONS

Woodchuck Desticker (30/36 and 20/30 models only)

Night lights

Remote control (1 sender, 1 receiver)

Cleated incline belt

SPECIFICATIONS

Length: 49' Width: 7.5' (30/36 model), 6.5' (20/30 & 20/20 model)

Hopper length: 16.5'

Hopper width: 6.5' (30/36), 5'8" (20/30 & 20/20)

Height: 18.5' fixed (30/36), 18.5' adjustable (20/30 & 20/20)

Tow height: 13'5"

Hitch height: 16 - 18"

Weight: 7,870 lbs (30/36)

4,350 lbs (20/30)

3,950 lbs (20/20)



JackRabbit • 417 Industrial Ave. Ripon CA • 209-559-6118
www.jackrabbit.bz

112911