

Above them all...




PRUNE-RITE

**25 hp Diesel Engine • Fast Cruiser Speed
More Wheel Torque • Safe-Easy Towing**

• Durable • Affordable • Reliable • Profitable • Safe

Four Models to choose from:
10' - 15' - 20' - 25'

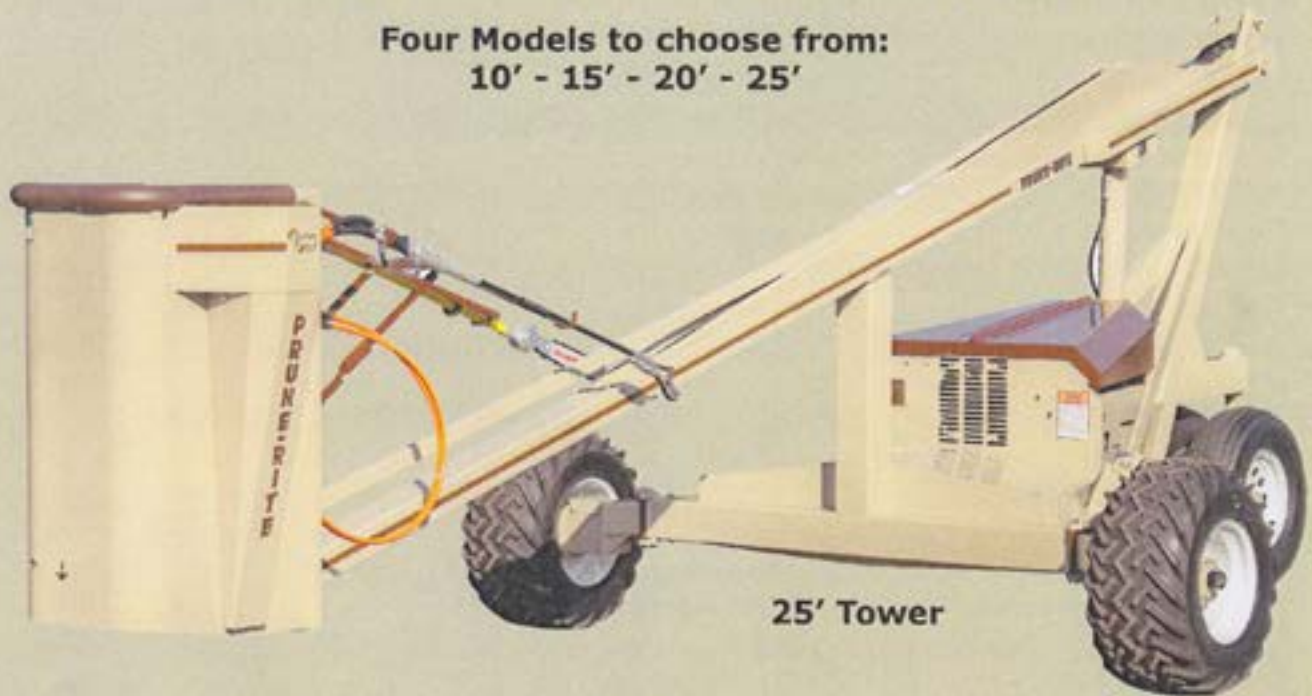

25' Tower



Axle extension
(25' model)



Folding tool mount




Door safety latch



Easy Access Door

Prune-Rite 1318 N. Dakota Ave. • Modesto, CA 95358 • Ph. 209.521.9825 • Fax 209.521.8810
www.prune-rite.com



PRUNE-RITE



**Push button
lockout hubs**



Joystick



Boom Lift



**25hp Kubota
Diesel engine**

SPECIFICATIONS

PR120 (10'), PR180 (15'), PR240 (20'), PR300 (25')
all with Cruiser Speed

SPECIFICATIONS	PR120	PR180	PR240	PR300
Platform height in feet	10'	15'	20'	25'
Engine (diesel)	Kubota D-1105, 25 hp	•	•	•
Cruiser Speed Joystick	Joystick hydraulic - 2 speed electric	•	•	•
Throttle (operator platform)	Electric solenoid	•	•	•
Tow Capacity	Highway towable	•	•	•
Tow Package	Tongue, jack	•	•	•
Hydraulic Pump	Dual	•	•	•
Boom Lift Control	Electric hydraulic	•	•	•
Turning Radius		9.5'	9.5'	10.0'
Length (in inches)	175"	205"	215"	280"
Width (in inches) fixed	72"	96"	117"	
Width (in inches) wheels retracted				117"
Width (in inches) wheels extended				153"
Weight (in pounds)	1400 lbs	2150 lbs	2350 lbs	2950 lbs
Stabilizer Bar Bearings	2/non-serviceable bearings	•	•	•
Main Boom Pivot Bearings	2/urethane bearings	•	•	•
Cage Pivot Bottom Bearings	2/urethane bearings	•	•	•
Boom Cylinder Pivots	2/urethane bearings	•	•	•
Caster Wheel Pivot	Sealed timken bearings	•	•	•
Frame	Uniwelded tubular	•	•	•
Caster Tires	11L x 15	•	•	•
Drive Tires	31 x 15.50 - 15	•	•	•
Boom	Tubular with top bridge	•	•	•
Fuel Capacity	6.0 gal (integrated in frame)	25.0 gal Poly Tank	•	•
Hydraulic Oil Capacity	14.0 gal (integrated in frame)	14.0 gal	14.0 gal	14.0 gal
Hour Meter	Engine oil pressure activated	•	•	•

OPTIONS:

Oil Cooler	Mounted in front of radiator	•	•	•
Cage heater	Oil cooler in cage with electric fan	•	•	•
Hub Lockout Adaptors	Push-button type	•	•	•